


Enclosed Cable System with Portable Lowering Tool for Drop Ceiling Mount \*  
Manual System for Indoor and Outdoor Use.

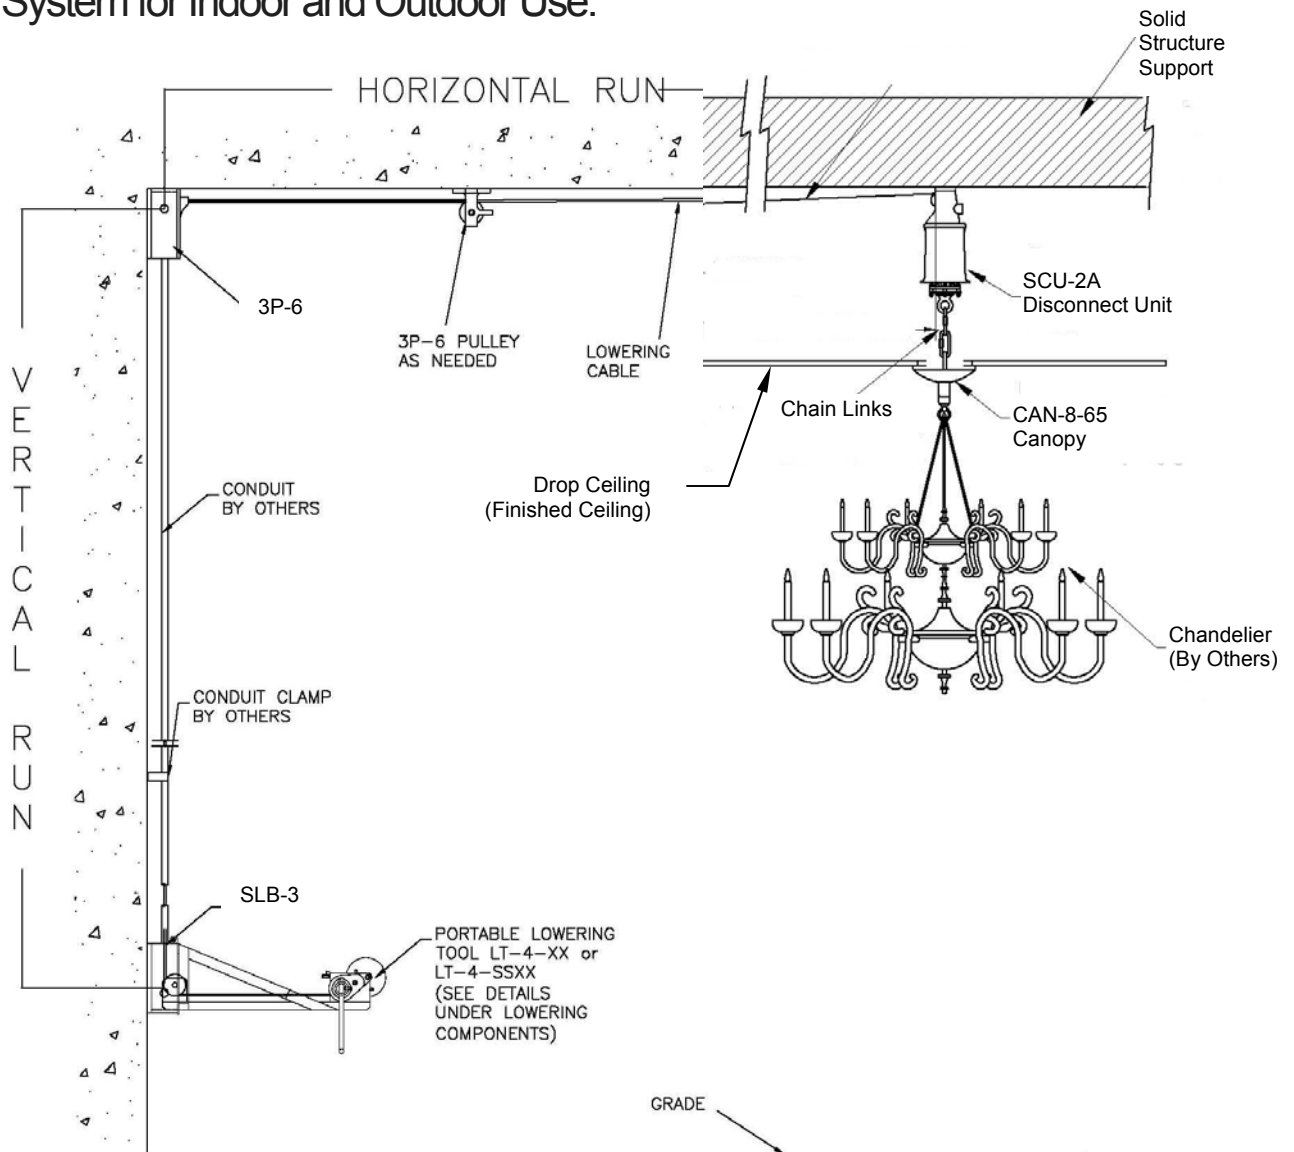


Details shown are intended as an application example only. Actual installation details may vary. Contact manufacturer's representative or factory for specific details about special installation application or other information. Lifting capacity is 400 lbs and must not be exceeded.

Disconnect unit support must be horizontal. Disconnect unit and pulley mounting structure must be strong enough to support 5 X load of the fixture in all directions.

\* Tool Sold Separately.

\*\* Specifications subject to change without notice.

Enclosed Cable System with Portable Lowering Tool \*  
Manual System suitable for Indoor and Outdoor Use

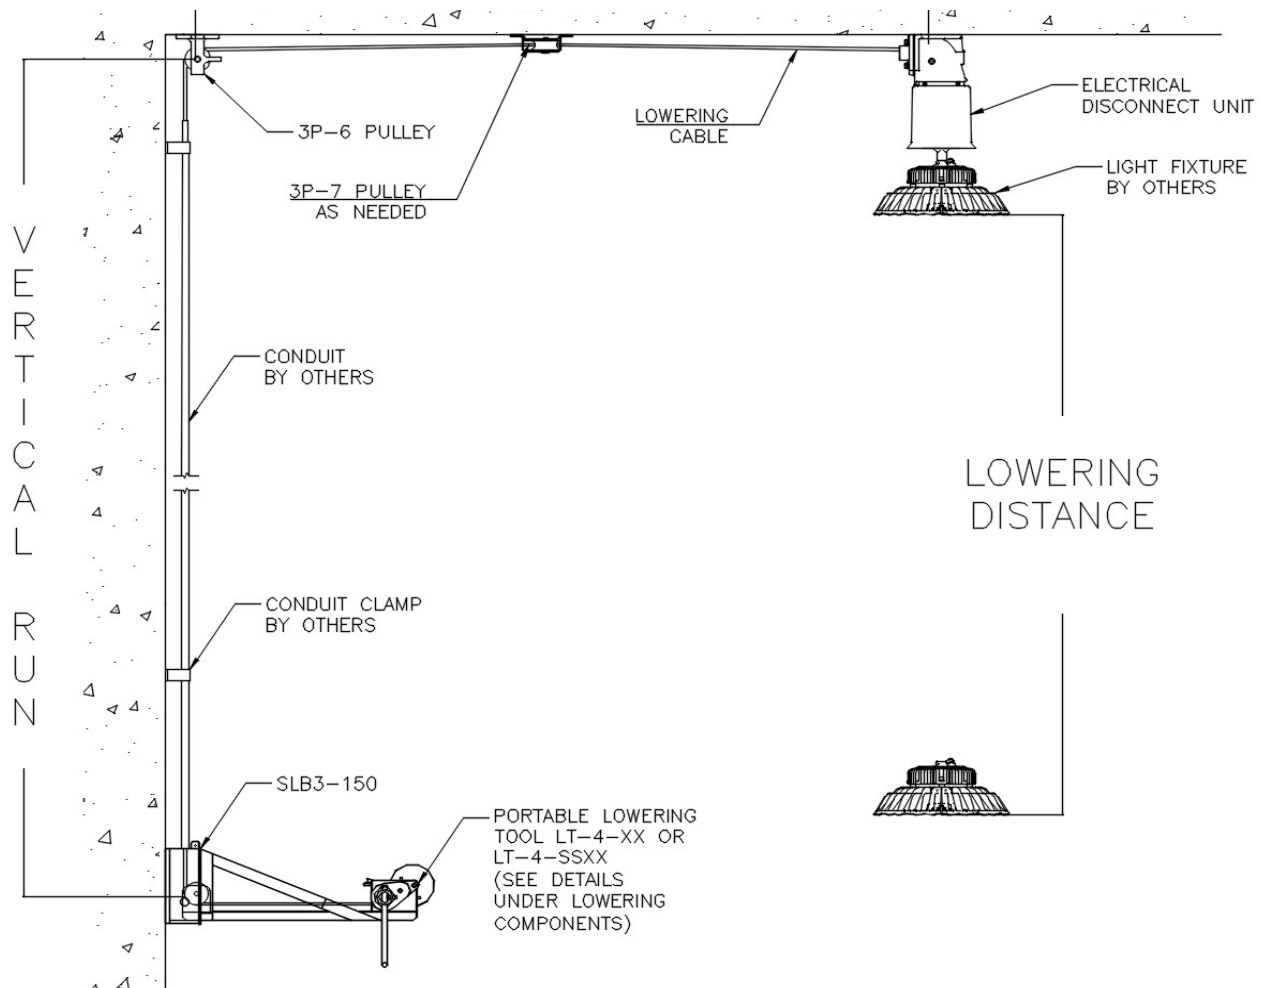


Details shown are intended as an application example only. Actual installation details may vary. Contact manufacturer's representative or factory for specific details about special installation application or other information. Lifting capacity is 400 lbs and must not be exceeded.

Disconnect unit support must be horizontal. Disconnect unit and pulley mounting structure must be strong enough to support 5 X load of the fixture in all directions.

\* Tool Sold Separately.

\*\* Specifications subject to change without notice.

Example with Sloped Ceiling

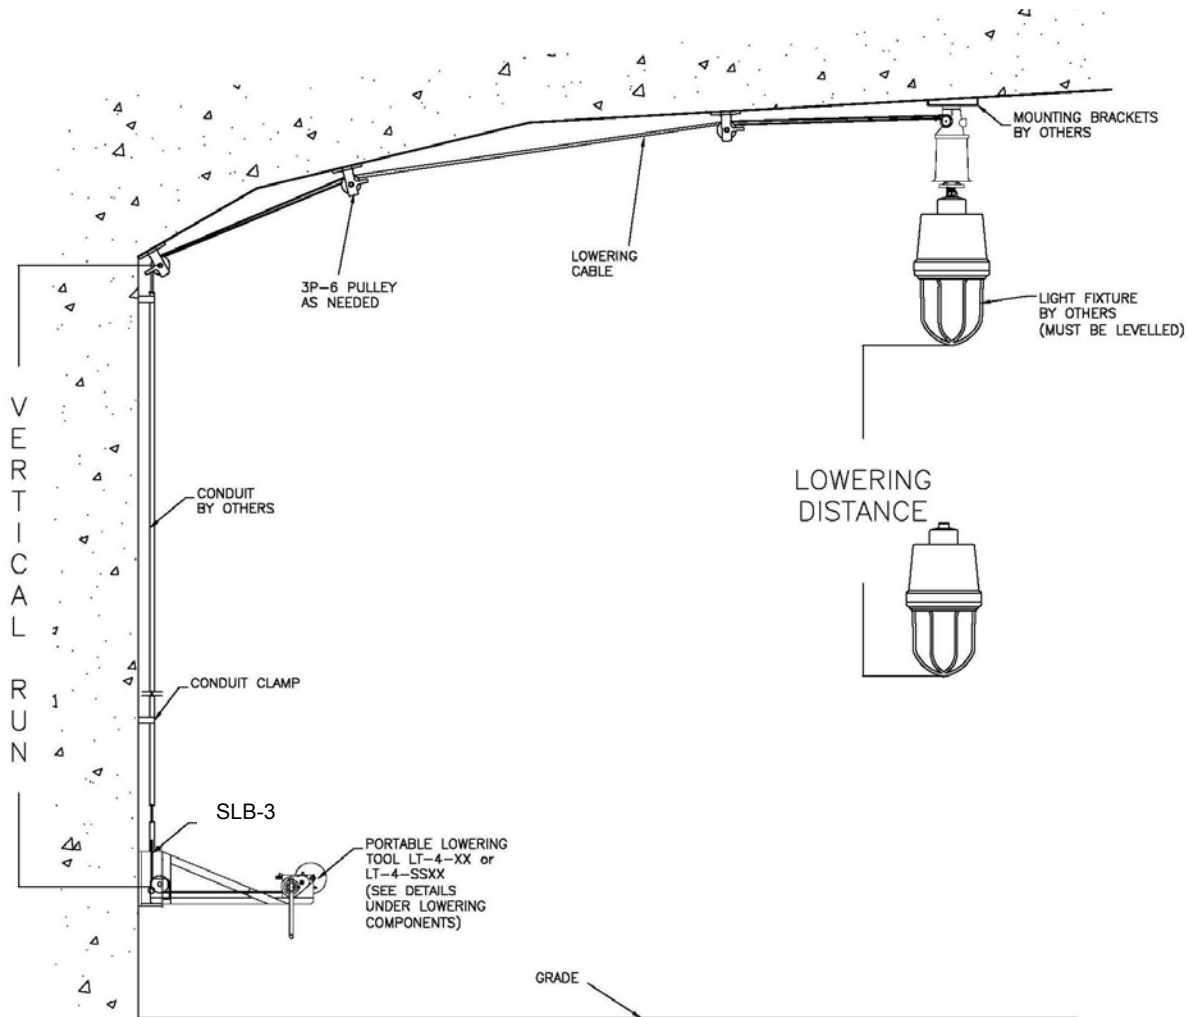

This system can be used with inclined ceilings provided the horizontal support for disconnect unit fulfilling all the requirements (as described below) is provided by others. Details shown are intended as an application example only. Actual installation details may vary. Contact manufacturer's representative or factory for specific details about special installation application or other information. Lifting capacity is 400 lbs and must not be exceeded.

Disconnect unit support must be horizontal. Disconnect unit and pulley mounting structure must be strong enough to support 5 X load of the fixture in all directions.

\*Tool Sold Separately.

\*\* Specifications subject to change without notice.

Principal Components of this system:

**1. Electrical Disconnect Unit Assembly:**

It comes with four electrical contacts plus one ground as standard. (Additional contacts are available) and includes fittings for surface mounting to a horizontal structure and flange/stem adapter for mounting the fixture to the disconnect unit. This system can be used with inclined ceilings provided the horizontal support for disconnect unit fulfilling all the above mentioned requirements is provided by others.


**2. Security Locking Box with Cover** (See details under mounting accessories).

**3. 5/32" Galvanized Steel Aircraft Cable Assembly:** Total cable length required is calculated as:  
Lowering Distance + 5 ft + Horizontal Run + Vertical Run

**4. One 3P-6 Pulley:** (See details under mounting accessories).

A 3P-6 pulley can guide the cable at a desired angle. Optional extra 3P-6 pulleys are available and must be used at every 30' of horizontal straight cable run and for every change in direction of the cable to a different plane. Optional 3P-7 pulleys are available to guide cable path away from obstructions. (See details under mounting accessories).

Security Lock Box & Portable Lowering Tool:

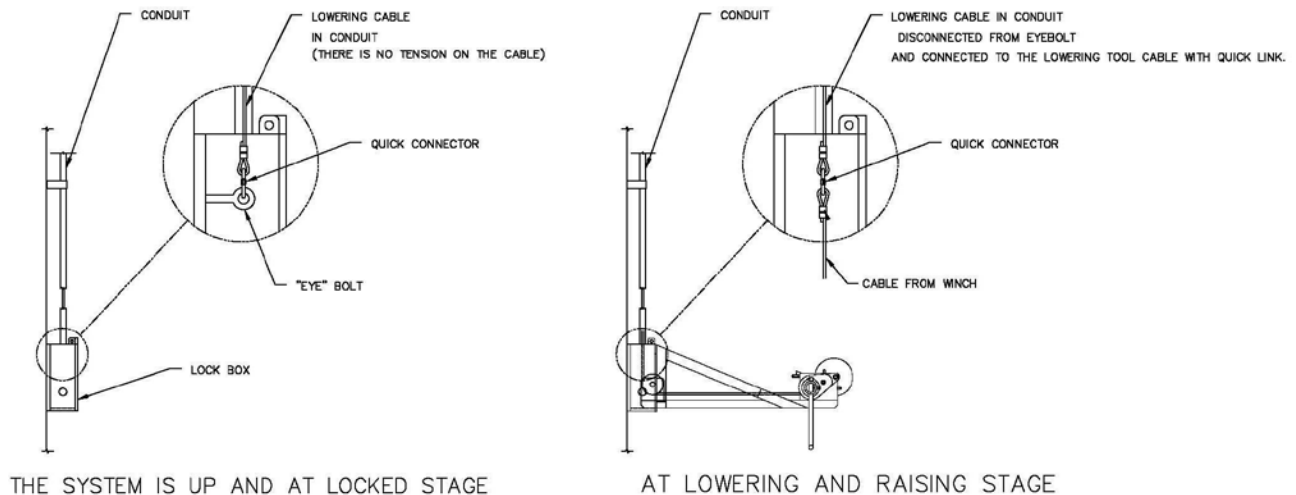

When the system is in the locked stage, there is no tension on the cable because of the lock that holds the fixture in place and it is not hanging on the cable. The eyebolt provides a secondary safety feature for this system. The Lock Box prevents tampering from outsiders. Only one portable lowering tool is required for a project. This saves cost. Quick connector provides easy connection of the cable from the lowering tool to the cable from the system. Details of the Security Lock Box and Portable Lowering Tool are available under Lowering and Mounting Components.

## Specifications Guide

❖ The EDU shall have a 3-way tracking guide and support. It shall be constructed of precision cast high strength aluminum alloy 356-T6. A permanently fixed position piece incorporating a special tracking guide system permits the moveable portion of the *Disconnect Unit* to align in the same position every time the system is operated, thereby eliminating the need to re-orientate the fixture. The Electrical Disconnect Unit shall have twin high strength stainless steel locking cams securing the load of the *Lower Contact Assembly* and fixture. All tension on the cable is relieved when the fixture is in the raised position.

❖ The MULTI-CONTACT Connector assembly shall be modular for easy installation and retrofit requirements. The connector shall also have 4 size 12 contacts. Material of contacts shall be copper with nickel plating, and with gold plating over nickel per MIL-G-45204. Electrical contacts shall have a rating of 20 year mean time between failures. All hardware shall be corrosion resistant stainless steel. It shall have a self-aligning and self-adjusting mechanical system comprised of two principal assemblies:

*The UPPER CONTACT HALF* shall house the socket contacts. It shall incorporate spring assisted polymer contact body with precision-machined stainless steel guideposts. The socket contact body shall have integral guideposts for precise contact alignment.

*The LOWER CONTACT HALF* shall house the pin contacts comprised of spring assisted polymer contact body with precision-machined stainless steel guidepost receivers. The pin contact body aligns with guideposts of integral socket body guideposts.


❖ The wire leads are potted in Superflex® Black RTV Silicone, an industrial grade sealant for bonding and sealing.

❖ The unit shall have a guidepost constructed of precision cast high strength stainless steel. It shall utilize a cast-in-place guide bar for precise alignment of *Lower Contact Assembly* with the fixed portion of the *EDU*.

❖ The **EDU shall have** twin (2) tracking support arms made of precision cast high strength stainless steel. When locked in the *3-Way Tracking Guide and Support* notches, the *Twin Tracking/Support Arms* shall hold the weight of the fixture and components and it shall remove all tension from the *Control Cable or Lowering Cable*.

❖ The lower contact assembly shall be constructed of precision cast high strength aluminum alloy. It shall feature a cast-in-place guide that mate with the fixed portion of the *Disconnect Unit* to aid in tracking and stability. All hardware used on the *Lower Contact Assembly* as well as the entire *Disconnect Unit* shall be made of corrosion resistant stainless steel.

❖ The disconnect unit shall have a **HOUSING SEAL** made up of a spun aluminum closure ring with a sealing gasket constructed of extra flexible polymer providing a weather-tight seal between *Lower Contact Assembly* and *Disconnect Unit Cover*. This provides a flexible environmental seal. Seal swipes and conforms to interior of cylinder housing during all operating stages of the disconnect unit.

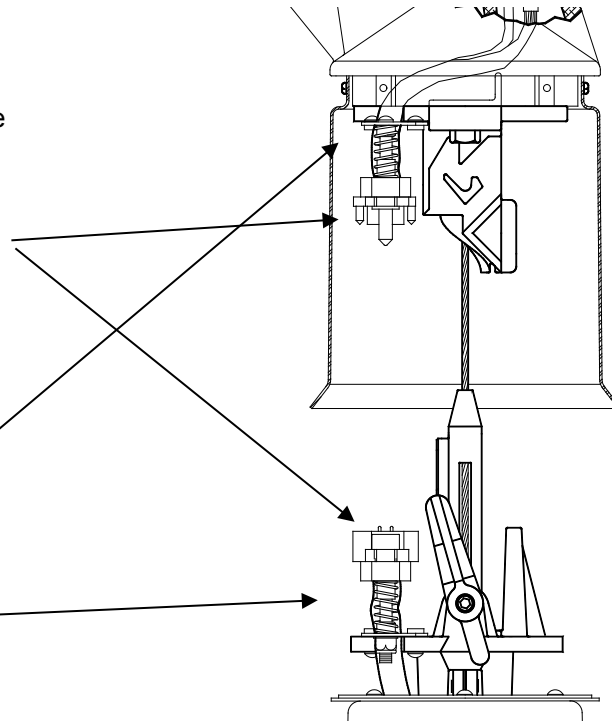

U.S. Patent No.  
6,261,122




### Electrical Contact Rating:

120V, 20 Amps per contact, (Multiple circuits)  
240V/277V, 15 Amps per contact (Multiple circuits)  
480V, 10 Amps (1 circuit max)  
600V, 5 Amps (1 circuit max)


**Mechanical Rating:** 400 lbs with 6:1 safety factor  
**Weight:** 8.5 LBS

SYSTEM DESIGNED SPECIFICALLY FOR USE WITH LIGHT FIXTURES, CAMERAS, AND RELATED EQUIPMENT ONLY.  
**NOT FOR LIFTING PEOPLE OR THINGS OVER PEOPLE.**  
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

**Specifications Guide**

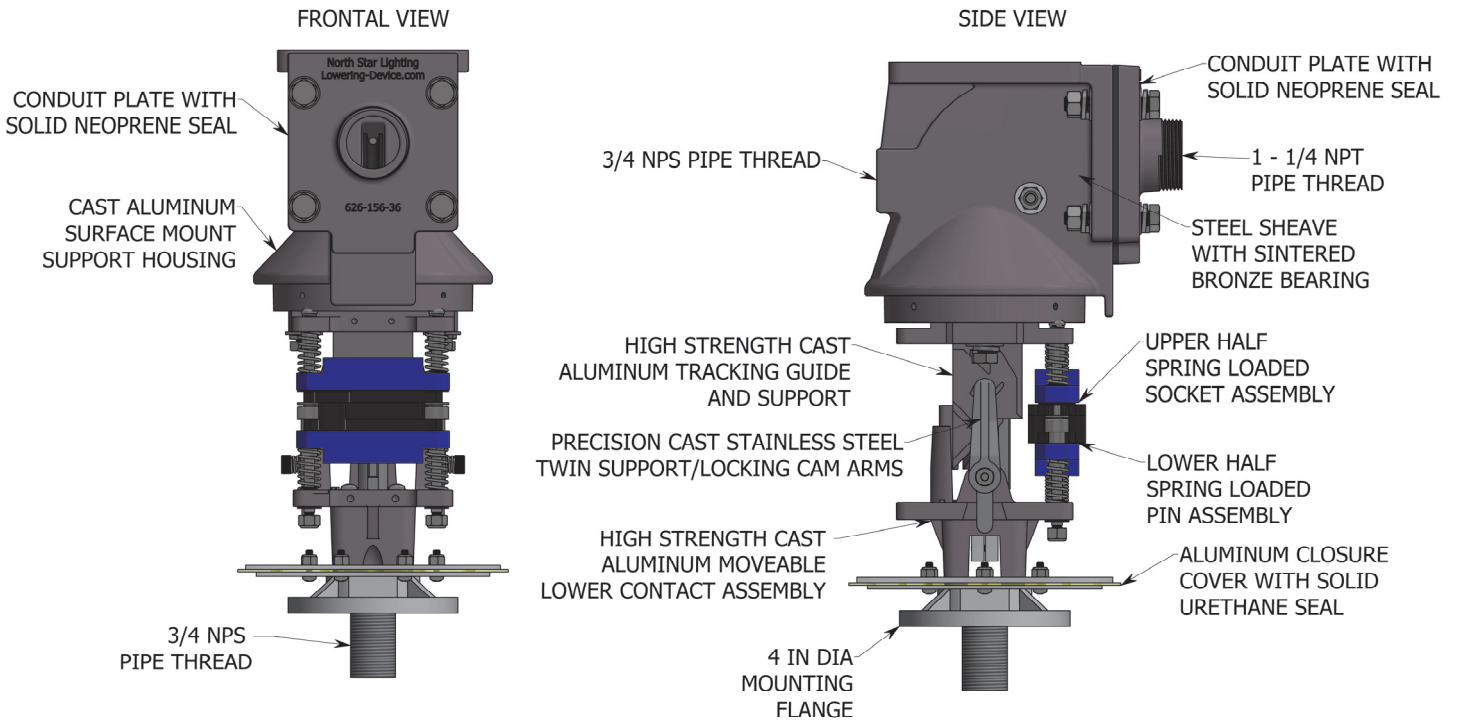


**FIXTURE MOUNTING FLANGE**




3/8 NPT INTERNAL PIPE THREAD

Ø.28 MOUNTING HOLES (4)




Ø3.25 IN MOUNTING HOLE DIAMETER

**SEAMLESS ALUMINUM ROUND COVER**

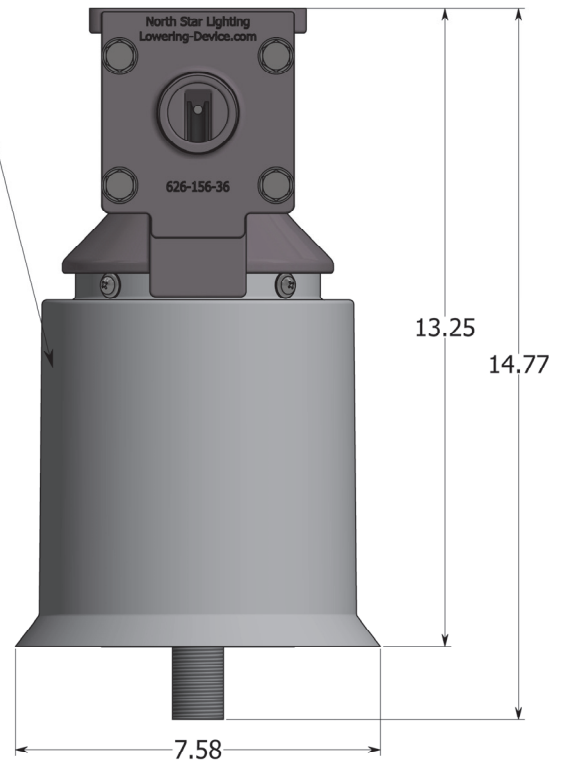


Options	Suffix
(4) Contacts (2 circuits)	-4C
(6) Contacts (3 circuits)	-6C
(8) Contacts (4 circuits)	-8C
3/8" Internal Pipe Thread Mounting	-38
Other mounting-consult factory	

### Cable Orientation Options:

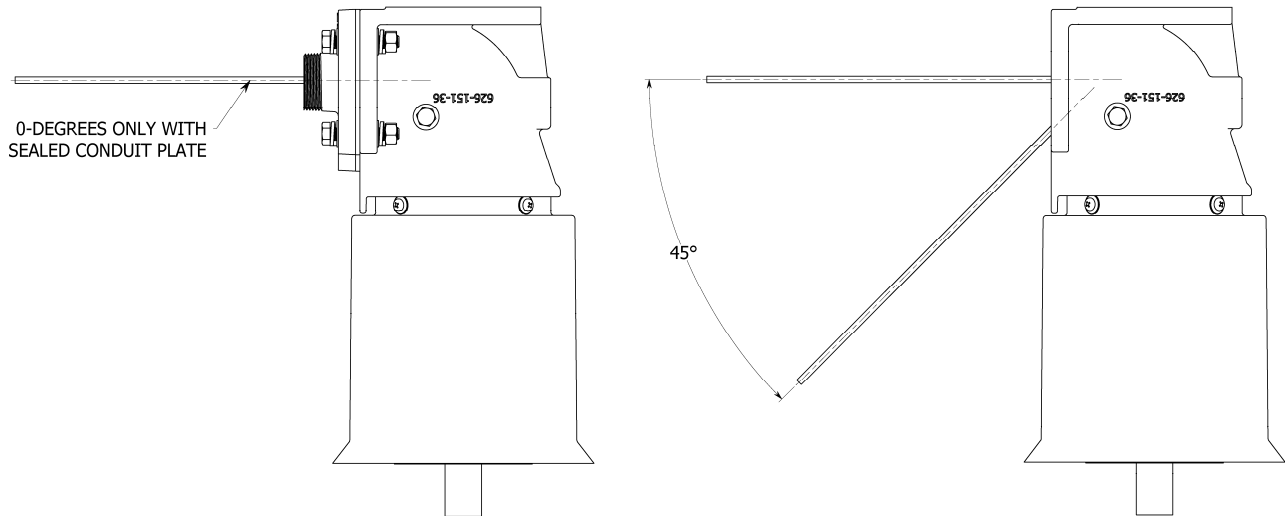


The disconnect unit allows the cable path orientation at an angle. The pulley installed in the upper casting attached to the disconnect unit guides the cable in the required orientation.

### Mounting Details:

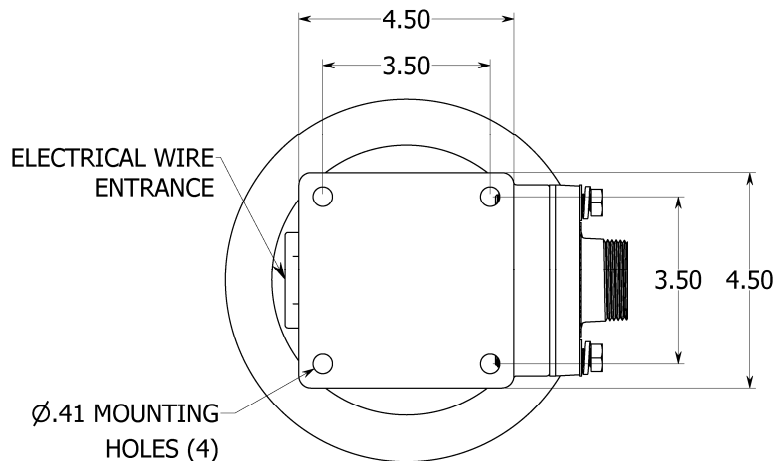

The disconnect unit must be mounted on rigid horizontal support. This support must be approved by others to be able to withstand static and dynamic loading of at least 5 X the weight of the fixture in all directions. Unistrut mounting structure should not be used due to bending and flexing of the unistrut during the raising and lowering operation. Square center hole is optional. Please specify if required at the time of ordering.

### Specification Guide for Other Components:

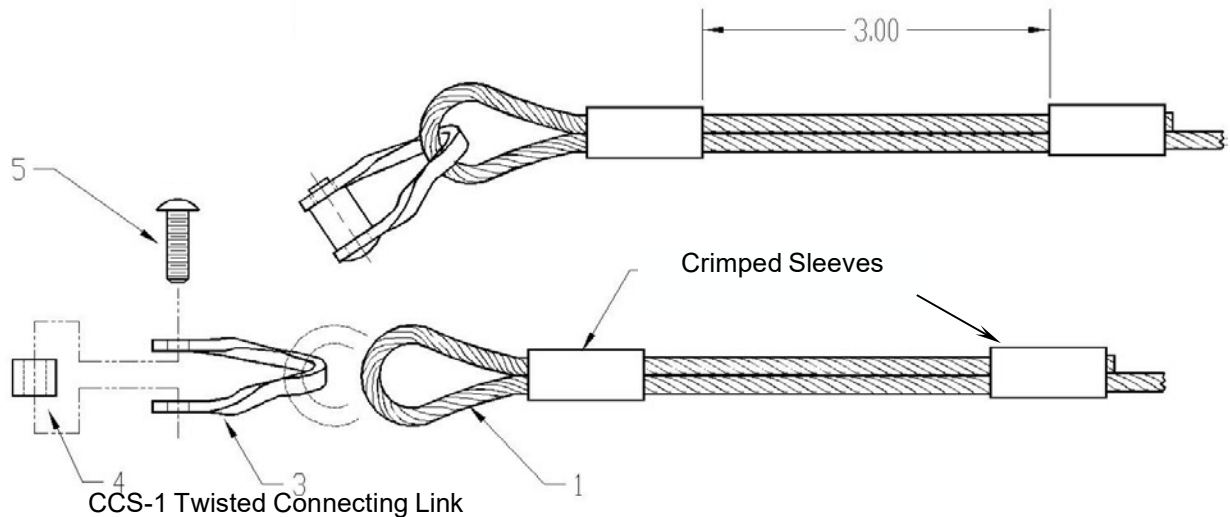


#### GA4407-XX Raising & Lowering (Control) Cable Assembly

- ❖ The system shall utilize a **GA4407-XX CONTROL CABLE** (mechanical raising and lowering cable) made of galvanized steel 5/32 inch diameter 7 x 19 construction cable. One end of the cable shall have a heavy duty stainless steel connector link (Optional Stainless Steel cable for very corrosive environments) with 2 sleeves crimped onto the cable.
- ❖ A **LT-4 LOWERING TOOL** (only 1 needed per order) shall be supplied with each order. It is a portable lowering tool consisting of the gearbox, disc brake, frame, and lowering cable. The gearbox shall be of heavy-duty design. It shall incorporate solid steel heated treated gears for maximum durability and strength. The gearbox shall be equipped with an automatically actuated disc brake preventing the load from freewheeling. The frame shall be of a heavy-duty design with brackets making the unit stable when mounted to the Security Locking Box. It shall have a corrosive resistant finish. The raising and lowering (control) cable shall be made of galvanized steel 5/32-inch diameter 7 x 19 construction. Minimum breaking strength shall be 2400lbs.
- ❖ A **3P-6** pulley shall be provided. It shall have an aluminum housing with a 3" diameter, aluminum wide mouth sheave with an oil-bronze bearing. Various types of pulleys are available and should be designed for the exact load. All pulleys shall have oilite bronze bearings for maintenance free life. This also insures their use for dirty atmosphere applications. Painted pulleys are available for highly corrosive areas. Pulleys are required when vertical or horizontal changes in direction occur. Five types are available for various mounting and load requirements. It is important that pulleys are properly aligned when installing and always take pulley friction into consideration if loads are near the limits.
- ❖ **SLB-3** Security Locking Box shall be supplied as a component of the ECS-400 system. It shall be comprised of heavy duty aluminum cable termination box with a neoprene gasket and matching hinged aluminum cover that can be locked with a padlock. It shall be permanently mounted on the wall or other structure capable of handling the stress of the raising and lowering process. The SLB shall also consist of a locking eye bolt inside the box for parking the cable while it is not being used. The SLB-3 shall also have a drilled and tapped hole for attaching a conduit (1 ½" NPS) to it.


**Other system is also available for fixture weighing above 400 lbs. Contact factory for details.**



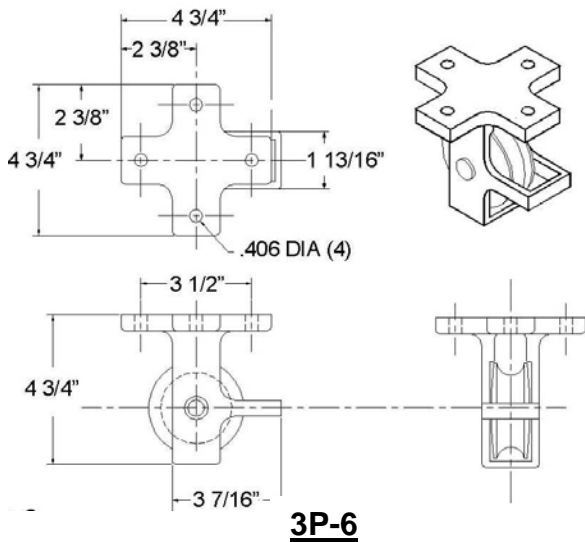

**3P-6**

Various types of pulleys are available and should be designed for exact load and gear box. All pulleys have oilite bronze bearings for maintenance free life. This also insures their use for dirty atmosphere applications. Painted pulleys are available for highly corrosive areas. Pulleys can be spaced 6-30' apart on horizontal runs. A pulley must be used at every 30' of horizontal straight runs. Pulleys are required when vertical or horizontal changes in direction occur. It is important that pulleys are properly aligned. The centerline of the pulley-sheave groove must coincide with the centerline of the cable path when installing. Always take pulley friction into consideration if loads are near limits of the gear box. Pulleys must be installed on rigid surfaces which are able to withstand at least 5 X load of the fixture in all directions. The installation must be approved by others.

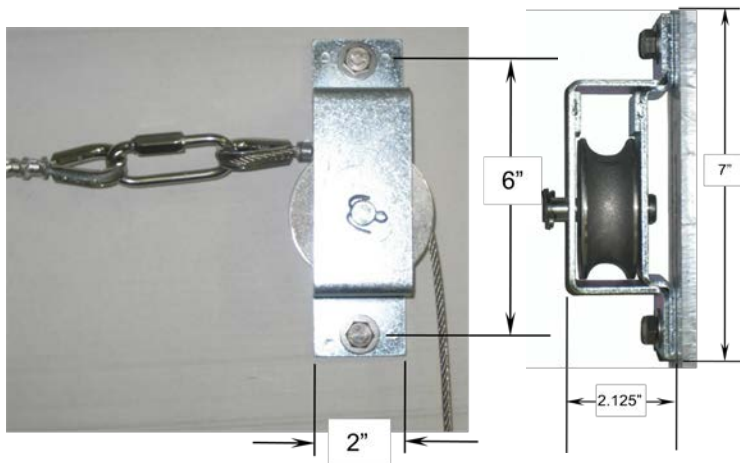

**3P-7**

### **3P-6**

Load capacity for a 3P-6 pulley is 20-400 lbs. A 3P-6 pulley can facilitate a change in direction of the cable from wall to ceiling i.e. from vertical to horizontal. 3P-6 pulleys should be spaced 6-30' apart on horizontal runs. Change in direction of cable to angles other than 90 degrees is possible. See page p3 for details. This pulley allows the twisted quick-link to pass through.

### **3P-7**

A 3P-7 pulley can facilitate a change in direction of the cable on the same plane i.e. on the ceiling or on the wall. The pulley allows the cable connecting link to pass through.


**Load capacity:** Up to 400 lb. fixtures.

**Frame Material:** Frame material of zinc plated 7gge. Steel.

**Frame Material Option:** Stainless steel frame. Contact factory.

**Sheave Material:** Sheave of cast aluminum with oilite bronze bearing.

**Mounting:** Two mounting holes for 3/8" bolts. Hardware by others. Type of hardware depends on the type of structure that the pulley is mounted to. Structure must not move while the system is in operation.

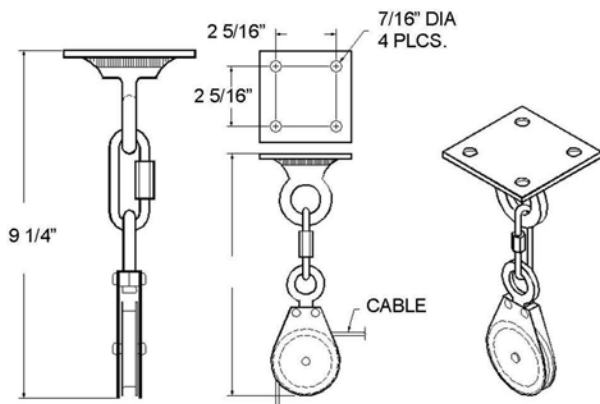


**3P-5**

### **3P-5**

Load capacity for a 3P-5 pulley is 20-400 lbs. A 3P-5 pulley can facilitate a change in direction of the cable in different planes by utilizing the swivel.

\* Specifications subject to change without notice.

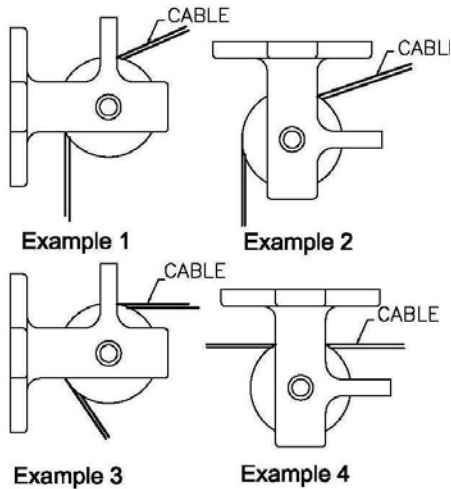


### 3P-6 and 4P-4 Uses

3P-6 and 4P-4 pulleys (depending upon load) can facilitate a change in direction of the cable from wall to ceiling i.e. from vertical to horizontal. These pulleys should be spaced 6-30' apart on horizontal runs. The above examples show that change in direction of cable to angles other than 90 degrees is possible. These pulleys can be placed horizontally (examples 2 and 4), vertically (examples 1 and 3) and on inclined surfaces for maximum versatility as long as the cable path is aligned to the pulley sheave groove and as long as the cable path is not interfered by any obstacles.

#### MAXIMUM FIXTURE LOAD

400 LBS	3P-6
1100 LBS	4P-4

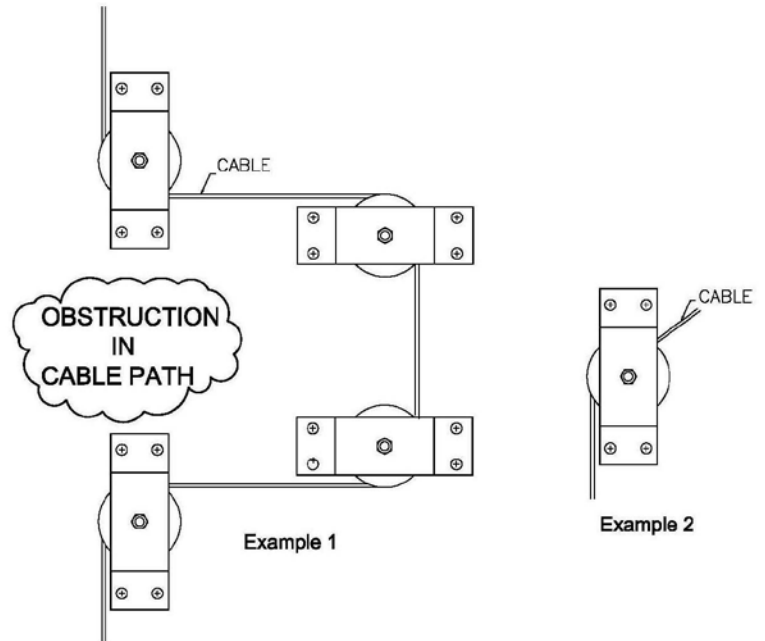

### 3P-7 and 4P-3 Uses

3P-7 and 4P-3 pulleys (depending upon load) can facilitate a change in direction of the cable on the same plane. Example 1 is a simple way using 4 pulleys to go around an obstruction in the cable path. In example 2, the pulley allows the cable to change direction on the same plane.

#### MAXIMUM FIXTURE LOAD

400 LBS	3P-7
1100 LBS	4P-3


\* Specifications subject to change without notice. Details shown are intended as an application example only. Actual installation details may vary. Contact manufacturer's representative or factory for specific details about special installation application or other information. Lifting capacity is 400 lbs and must not be exceeded.

#### Security Locking Box Design SLB-3

Each lowering cable must be terminated in a locking system. Two types are available to prevent unauthorized personnel from lowering the fixtures. The ECS system utilizes the **SLB-3** security locking box.

- **SECURITY:** When conduit entry is required and maximum protection is required, the use of the **SLB-3** security locking box is required. The box is of heavy gauge aluminum.
- **CORROSION RESISTANCE:** The cast aluminum box prevents corrosion. For highly corrosive areas, an optional painted unit is available.
- Vandal proof construction uses non-tool hardware.
- Hinged door utilizes tool-less hardware, preventing breaking into the box.
- Neoprene gasket around the door opening prevents water from penetrating.
- The lowering tool to service this box is the **LT-4-XX** (order separately). Each locking box uses a **CCS-1** cable attachment for use with conduit. The **CCS-1** is small enough for the conduit, but strong enough to handle up to 400 lbs fixtures. Recommended conduit size should be 1 ½".

BOX DIMENSIONS: 14"High x 6"Wide x 5"Deep

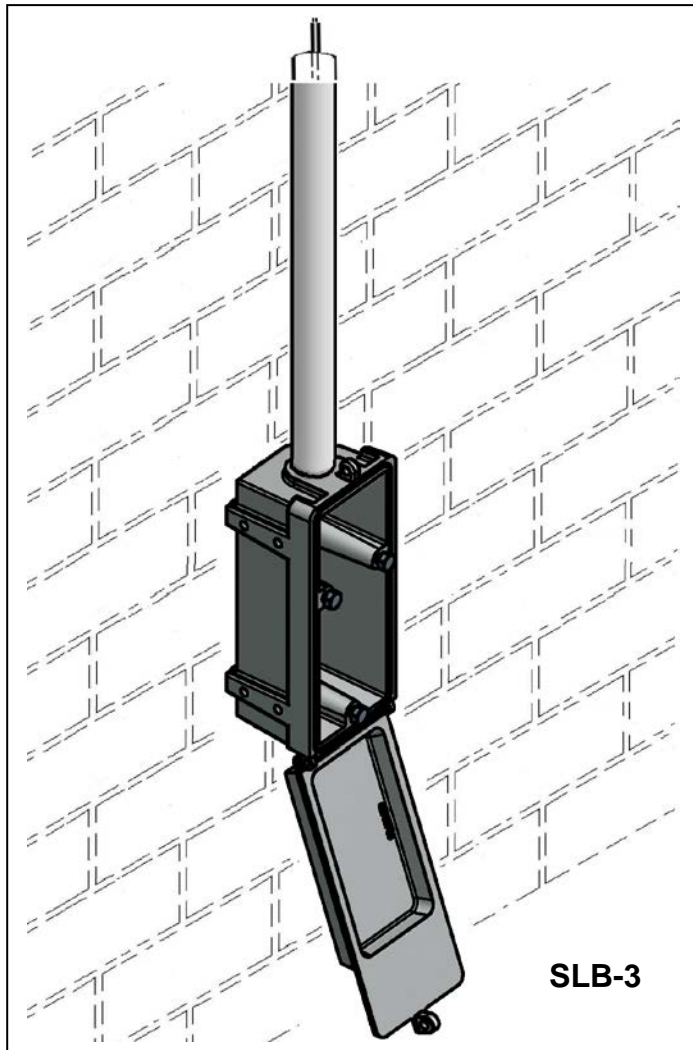




# LT-4-XX LOCKING BOX LOWERING TOOL

All gear boxes and lowering tools are of heavy duty design to provide reliability, long life, and ease of operation. They incorporate heat treated gears for maximum durability and strength. All are equipped with a special automatically actuated disc brake for better load holding ability and the prevention of the load free wheeling. The gear box assembly also has corrosion resistant plating. The systems are available for permanent installation or portable use indoors or outdoors for wall mounting or pole mounting. Each system is custom tailored to work with required load and operation for the raising/lowering specifications. The mounting bracket is made of heavy duty steel with a powder coated finish. The frame mounts to the Security Locking box utilizing 3 bolts.





Security Locking Box (SLB-3)

**CATALOG # LT-4-XX**  
PORTABLE LOCKING BOX MOUNTED LOWERING TOOL FOR FIXTURES UP TO 400 LBS.

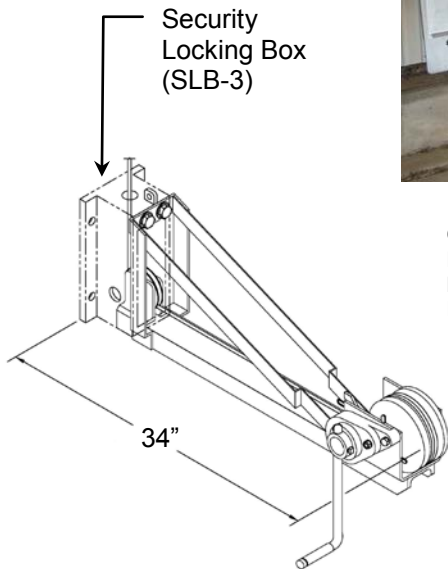

### Specifications on Lowering Tool

- Tool mounts on Security Locking Box
- Fabricated from heavy gauge steel w/black powder coat finish.
- The winch has a primer base coat followed by an enamel finish coat. Excellent resistance to corrosion.
- Oil impregnated bronze bushings and sealed ball bearings.
- All hardware is made out of stainless steel.
- The winch has a 3:1 Gear reduction to reduce the effort required to raise and lower the assembly.
- Winch comes with heavy-duty disk brake to afford greater load holding ability. This provides a positive locking mechanism to secure cable and keep from freewheeling.
- **Drum Capacity:** 75 ft.
- **Cable:** Equipped 5/32" 7x19 galvanized steel aircraft cable. • **Dimensions:** 29"L.x8"W. With handle, 12"W.
- **Dimension with Security Box:** 34" Long
- **Weight:**34LBS.

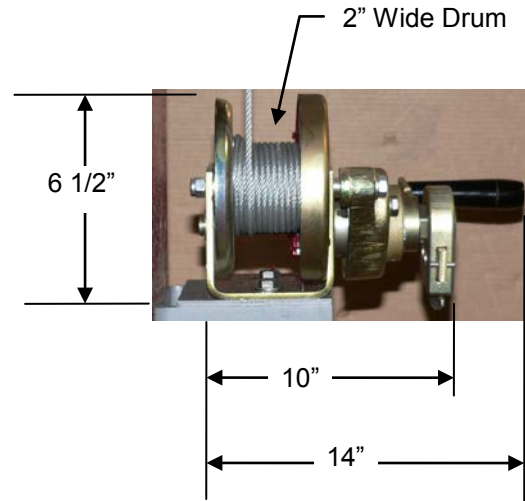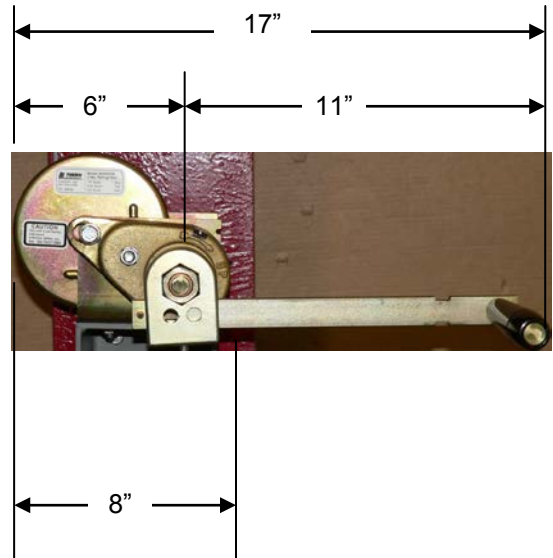




# LT-DRI-PWD<sup>®</sup> Drill Motor with Clutch and Adapters

## LOWERING CABLE Galvanized Steel winch cable

Drills are of heavy-duty design to provide reliability, long life, and ease of operation. They incorporate solid steel heat-treated gears for maximum durability and strength. Drill should be operated at a 300 RPM or slower speed. Operation of drill with our winch at a higher speed will reduce the longevity of the winch break system.

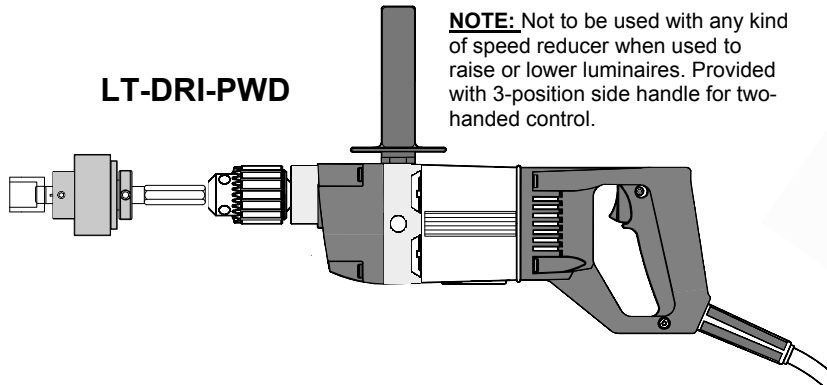

**LT-DRI-PWD**

**NOTE:** Not to be used with any kind of speed reducer when used to raise or lower luminaires. Provided with 3-position side handle for two-handed control.



### Drill Motor Specifications


- Drill is 1/2" double insulated, heavy duty, reversible, variable speeds, with 'D' handle.
- Chuck size is 1/2" key chuck with key.
- Electrical-Nom. 5 amp universal motor 115v.AC
- Torque-Develops nominal 170 lbs.-in.
- Speed/HP-.5 H.P.
- Powerful 7 Amp
- Variable speed 0-600 RPM, Reversible
- Gear Train: Triple
- (Note: drill should be operated at a maximum of 300RPM to prevent damage to the winch)
- Overall length is 15-1/8"
- Weight: Approx. 7lbs. 6oz.

### Overload Clutch Specifications

- Lubricated ball indent-totally enclosed-adjustable torque limiting.
- Coil spring type. Varied quantities depending on torque range. Torque range: 60 to 300 lb./in.
- Dimensions of clutch: 1 1/2"Dia., 1 5/8"L. Overall, 8 1/2"L
- Open-end wrench type torque-adjusting nut.
- Snap ring tool included with clutch.
- Clutch weight: 2 lbs.


### Winch/Clutch/Drill Adapter

- Winch drive is 1-1/8" hex socket with 1/2" sq. drive.
- Hub shaft: 3/8" sq. w/spring loaded pin (clutch end).
- Socket shaft: 3/8" sq. w/spring loaded retaining pin.

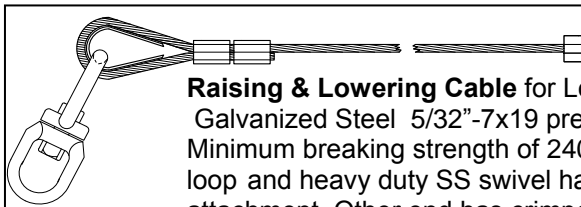

**Raising & Lowering Cable** for Lowering Tool. Made of Galvanized Steel 5/32"-7x19 preformed aircraft cable. Minimum breaking strength of 2400 lbs. Comes with loop and heavy duty SS swivel hardware cable attachment. Other end has crimped on copper stop.

\* Specifications subject to change without notice.

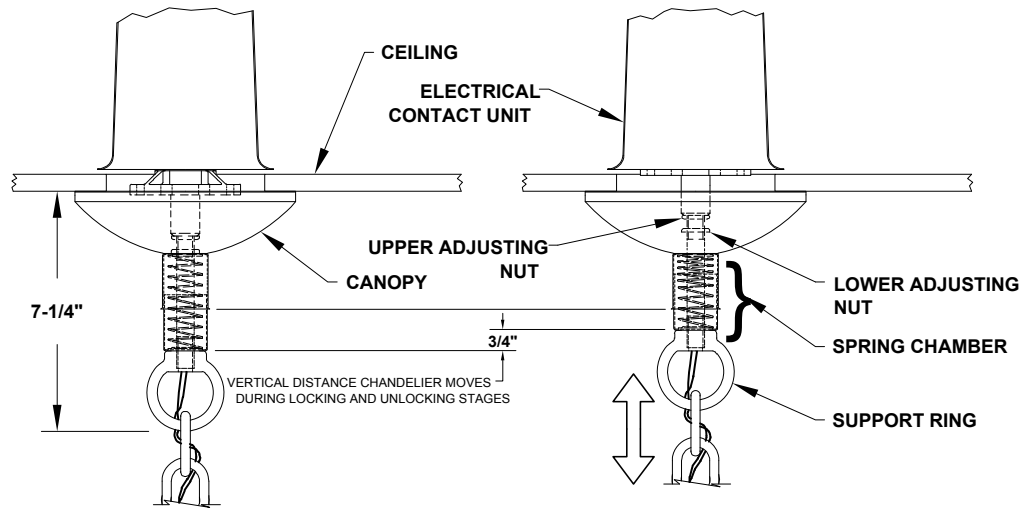**OPTIONAL CANOPY ASSEMBLY**
**Specification Sheet for CAN-8-65**
**CAN-8-65: Height-compensating canopy assembly**


During the lowering or raising of the fixture, when the electrical contacts engage within the ceiling mounted locking device, there is approximately  $\frac{3}{4}$ " travel up and down to set the locking mechanism. The height compensating canopy will adjust to this condition to assure that the canopy will remain against the ceiling surface.

**CANOPY:** One piece 8" diameter and  $2\frac{1}{4}$ " deep heavy gauge spinning with standard polished brass finish.

**SPRING CHAMBER:** Telescoping cups with bright brass finish enclose a  $\frac{3}{8}$ " pipe stem that connects the electrical contact unit with the chandelier support ring. A large diameter compression spring within the chamber provides a constant and even pressure to keep the canopy against ceiling.

**SUPPORTING RING:** A heavy duty solid brass ring is provided. The ring is threaded onto the end of the  $\frac{3}{8}$ " stem and secured with a lock nut. Electrical wires are fed through a center hole in the ring.

- \* Wiring from the locking contact mechanism to the chandelier support chains, connecting links, and chandeliers with related hardware are provided by others.
- \* All specifications subject to change without notice.